




NU-TUBE PA



Mechanical & Abrasion Protection
Noise Reduction



Tubular, Wrappable & Shrinkable Sleeving



Woven



Polyamide multifilament



Standard: Black



Low: -40°C (-40°F)
High: 125°C (257°F)




High extreme abrasion resistance
Sound dampening
Cut-through resistance

PHYSICAL PROPERTIES

Physical properties	Spec	Value
Long term aging (3000h/125°C)	-	pass
Short term aging (240h/150°C)	-	pass
Abrasion resistance	GMW 14327	category 8
Flammability	FMVSS 302 SAE J 369	self-extinguishing
Noise test	GMW 14327	class D
Chemical resistance	Resists the majority of chemicals and automotive fluids	

DIMENSIONS

Designation	Nominal Ø (ID) (mm)
NU-TUBE PA 08	8
NU-TUBE PA 11	11
NU-TUBE PA 13	13
NU-TUBE PA 16	16
NU-TUBE PA 19	19
NU-TUBE PA 23	23
NU-TUBE PA 25	25
NU-TUBE PA 27	27
NU-TUBE PA 32	32
NU-TUBE PA 38	38
NU-TUBE PA 45	45
NU-TUBE PA 51	51
NU-TUBE PA 57	57
NU-TUBE PA 64	64
NU-TUBE PA 70	70
NU-TUBE PA 76	76

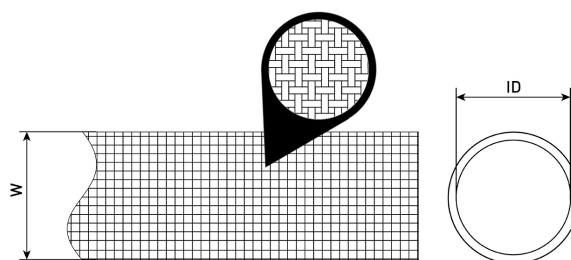

PACKAGING

Coils
Cut lengths upon request