



DUNBAR – 4635

4:1 SHRINK RATIO, FLEXIBLE, FLAME RETARDANT, POLYOLEFIN TUBING

Applications

DUNBAR-4635 is a flexible, high shrink ratio, flame retardant, heat resistant, heat shrinkable polyolefin tube. It is designed for a wide range of applications requiring high heat-resistance, including insulation for electric & electronic devices, wire strain relief and protective covering for parts such as resistors and capacitors.

Features

- ★ Shrink ratio: 75% or more in the radial direction, 50% or less in the axial direction
- ★ In stock for immediate shipments
- ★ Continuous operating temperature: - 55 °C (-67 °F) to 135 °C (275 °F)
- ★ Flammability: UL VW-1, CSA OFT (except clear)
- ★ High resistance to abrasion, chemicals and oils

Standard

- ★ AMS-DTL-23053/5 Class 1, Class 2 is Clear (Formerly MIL-DTL-23053/5 Class 1 & 2)
- ★ UL 224 (File Number: E319314)
- ★ RoHS Compliant

Specification Values

Property		Test Method	Value	
Physical	Unaged	Tensile strength	Min. 1,500 psi	
		Elongation	Min. 200%	
	Aged	Elongation	Min. 100%	
	Fluid Resist.	Tensile strength	24 °C/24 hrs	Min. 1,000 psi
		Dielectric strength	6 Fluids	Min. 400 Volts/mil
	Concentricity		ASTM D2671	Min. 50%
	Heat shock		250 °C/4 hrs	No cracks, flowing or dripping
	Low temperature flexibility		- 55 °C/4 hrs	No cracking
	Secant modulus		ASTM D882	Max. 25,000 psi
Specific gravity		ASTM D792	Max. 1.35 (Max. 1.00 Clear)	
Electrical	Dielectric strength		ASTM D2671	Min. 500 Volts/mil
	Volume resistivity		ASTM D876	Min. 10 ¹⁴ Ω - cm
Chemical	Copper corrosion		175 °C/16 hrs	No corrosion
	Fungus resistance		ASTM G21	No growth
	Water Absorption		ASTM D570	Max. 0.5%
	Flammability		ASTM D2671	Pass

Rev. May 2017




Dunbar Products, LLC
Tubing and Identification Products

1302 Champion Circle, Carrollton, TX 75006
Tel: (469) 568-0800
Fax: (469) 568-0808



DUNBAR – 4635

4:1 SHRINK RATIO, FLEXIBLE, FLAME RETARDANT, POLYOLEFIN TUBING

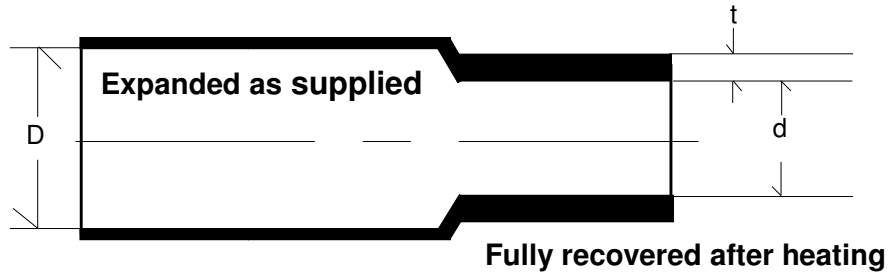

Product Dimensions

Minimum Shrink Temperature: 90°C

Size	Expanded		Recovered			
	Internal Diameter Minimum (D)		Internal Diameter Maximum (d)		Minimum Total Wall Thickness (t)	
Metric (Inch)	In.	mm	In.	mm	In.	mm
12mm (1/2")	0.470	12.0	0.118	3.0	0.037	0.96
19mm (3/4")	0.750	19.0	0.180	4.5	0.037	0.96
25mm (1")	1.0	25.4	0.276	7.0	0.037	0.96
32mm (1-1/4")	1.26	32.0	0.315	8.0	0.059	1.50
38mm (1-1/2")	1.50	38.0	0.374	9.5	0.059	1.50

Rev. May 2017



Dunbar Products, LLC
Tubing and Identification Products

1302 Champion Circle, Carrollton, TX 75006
Tel: (469) 568-0800
Fax: (469) 568-0808